


TY-LED-20RL/INS/NG Type 2+3 Surge Arrester

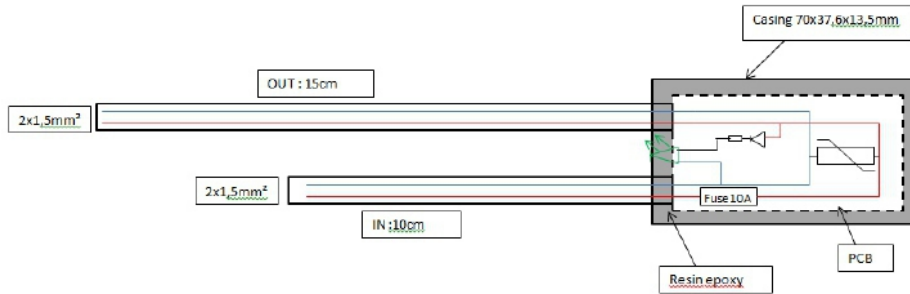

TY-LED-20RL/INS/NG

SPD classification according to EN61643-11		Type 2+Type 3
SPD classification according to IEC61643-11		Class II+Class III
Normal a.c. voltage	Un	230V
Max. continuous operating a.c. voltage	Uc	275V
Frequency		50-60Hz
Nominal discharge current (8/20 μs)	In	5kA
Max. discharge current (8/20 μs)	I _{max}	20kA
Nominal current	IL	10A
Combined impulse	Uoc	6kV
Voltage protection level	Up	≤1.3kV
Response time	t _A	≤100ns
Operating temperature range	Tu	-40°C-80°C
Operating state/fault indication		green/non
Section of cables		1.5mm ²
Length of cables		110mm/150mm
Degree of protection		IP 65